

FORM PTO-1390 (REV. 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER SPO-594	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 09/831709	
INTERNATIONAL APPLICATION NO. PCT/JP00/06288		INTERNATIONAL FILING DATE 13 September 2000		PRIORITY DATE CLAIMED 20 September 1999	
TITLE OF INVENTION METHOD OF PREPARING A CERAMIC ARTIFICIAL CROWN AND A PREPARATION KIT USED THEREFOR					
APPLICANT(S) FOR DO/EO/US Masato SEKINO, et al.					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p style="margin-left: 20px;">b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p style="margin-left: 20px;">a. <input checked="" type="checkbox"/> is attached hereto.</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p style="margin-left: 20px;">d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information: Copy of PCT/IB/308 Translator's Statement Three (3) sheets formal drawings</p>					

U.S. APPLICATION NO. 09/831709 (if known, see 37 CFR 1.53) INTERNATIONAL APPLICATION NO. PCT/JP00/06288		ATTORNEY'S DOCKET NUMBER SPO-594																										
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =		CALCULATIONS PTO USE ONLY																										
		Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).																										
		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">CLAIMS</th> <th style="width: 20%;">NUMBER FILED</th> <th style="width: 20%;">NUMBER EXTRA</th> <th style="width: 20%;">RATE</th> <th style="width: 20%;">\$</th> </tr> </thead> <tbody> <tr> <td>Total claims</td> <td>26 - 20 =</td> <td>6</td> <td>x \$18.00</td> <td>\$ 108.00</td> </tr> <tr> <td>Independent claims</td> <td>4 - 3 =</td> <td>1</td> <td>x \$80.00</td> <td>\$ 80.00</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> </tr> <tr> <td colspan="4" style="text-align: right;">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$ 1048.00</td> </tr> </tbody> </table>		CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	Total claims	26 - 20 =	6	x \$18.00	\$ 108.00	Independent claims	4 - 3 =	1	x \$80.00	\$ 80.00	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00	TOTAL OF ABOVE CALCULATIONS =				\$ 1048.00
		CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$																						
Total claims	26 - 20 =	6	x \$18.00	\$ 108.00																								
Independent claims	4 - 3 =	1	x \$80.00	\$ 80.00																								
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00																								
TOTAL OF ABOVE CALCULATIONS =				\$ 1048.00																								
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.																												
SUBTOTAL =		\$ 1048.00																										
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).		\$																										
TOTAL NATIONAL FEE =		\$ 1048.00																										
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +		\$ 40.00																										
TOTAL FEES ENCLOSED =		\$ 1088.00																										
		Amount to be refunded:	\$																									
		charged:	\$																									

a. ☒ A check in the amount of **\$ 1,088.00** to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. **19-1980**. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card
 information should not be included on this form. Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

SHERMAN & SHALLOWAY
 413 N. Washington Street
 Alexandria, VA 22314
 703-549-2282

SIGNATURE 
 NAME **Leonard W. Sherman**
 REGISTRATION NUMBER **19,636**

SPO-594

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the application of:

Masato SEKINO, et al.

Serial No.: Unassigned

Group:

Filed: Concurrently

Examiner:

FOR: METHOD OF PREPARING A CERAMIC ARTIFICIAL CROWN AND A
PREPARATION KIT USED THEREFOR

Date: May 14, 2001

The Hon. Commissioner of
Patents and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to examination, please amend the herewith filed
application as follows:

IN THE CLAIMS

Please cancel Claims 3-11 in their entirety and without
prejudice.

Please add the following new claims:

--16. (New) The method according to claim 1 further
comprising applying the solid lubricant to the wax pattern by
applying a suspension comprising the solid lubricant, an organic
binder and an organic solvent, followed by drying.

17. (New) The method according to claim 2 further comprising applying the solid lubricant to the wax pattern by applying a suspension comprising the solid lubricant, an organic binder and an organic solvent, followed by drying.

18. (New) The method according to claim 16 wherein said suspension comprises from 0.1 to 30% by weight of the solid lubricant, from 0.1 to 20% by weight of the organic binder and the remainder of the organic solvent.

19. (New) The method according to claim 17 wherein said suspension comprises from 0.1 to 30% by weight of the solid lubricant, from 0.1 to 20% by weight of the organic binder and the remainder of the organic solvent.

20. (New) The preparation method according to claim 1 wherein the ceramic material put into the mold has a viscosity of from 10^2 to 10^9 poises.

21. (New) The preparation method according to claim 19 wherein the ceramic material put into the mold has a viscosity of from 10^2 to 10^9 poises.

22. (New) The preparation method according to claim 1 wherein the ceramic material is a crystalline MgO-CaO-SiO₂ glass material.

23. (New) The preparation method according to claim 20 wherein the ceramic material is a crystalline MgO-CaO-SiO₂ glass material.

24. (New) The preparation method according to claim 21 wherein the ceramic material is a crystalline MgO-CaO-SiO₂ glass material.

25. (New) The preparation method according to claim 1 further comprising providing the pole member of the crucible former with a diameter which widens downward and is tapered at 0.005 to 0.120.

26. (New) The preparation method according to claim 24 further comprising providing the pole member of the crucible former with a diameter which widens downward and is tapered at

0.005 to 0.120

27. (New) The preparation method according to claim 1 further comprising providing said plunger made of a ceramic material having a melting point or decomposition temperature, whichever is lower, which is higher than a temperature of forming the ceramic artificial crown and having a thermal conductivity of not smaller than $0.1(\text{cal}\cdot\text{cm}^{-1}\cdot\text{sec}^{-1}\cdot^{\circ}\text{C}^{-1})$ or a coefficient of linear expansion of not larger than $4.0\times 10^{-6}(^{\circ}\text{C}^{-1})$.

28. (New) The preparation method according to claim 26 further comprising providing said plunger made of a ceramic material having a melting point or decomposition temperature, whichever is lower, which is higher than a temperature of forming the ceramic artificial crown and having a thermal conductivity of not smaller than $0.1(\text{cal}\cdot\text{cm}^{-1}\cdot\text{sec}^{-1}\cdot^{\circ}\text{C}^{-1})$ or a coefficient of linear expansion of not larger than $4.0\times 10^{-6}(^{\circ}\text{C}^{-1})$.

29. (New) The preparation method according to claim 1 further comprising adhering a solid lubricant in advance onto the surface of the plunger that comes into contact with the ceramic material.

30. (New) The preparation method according to claim 28 further comprising adhering a solid lubricant in advance onto the surface of the plunger that comes into contact with the ceramic material.

31. (New) The preparation method according to claim 1 further comprising applying a dental porcelain onto the surface of the ceramic core, followed by baking, wherein the dental porcelain applied is a kneaded product obtained by kneading with water a body porcelain, an incisal porcelain or a translucent porcelain which comprises:

100 parts by weight of a glass material containing, on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm .

32. (New) The preparation method according to claim 30 further comprising applying a dental porcelain onto the surface of the ceramic core, followed by baking, wherein the dental porcelain applied is a kneaded product obtained by kneading with water a body porcelain, an incisal porcelain or a translucent porcelain which comprises:

100 parts by weight of a glass material containing, on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm .

33. (New) The preparation method according to claim 1 further comprising coloring and lustering the surface of said crown by applying a kneaded product to the surface of the fired article, followed by firing, wherein the kneaded product is obtained by kneading a staining powder and a glazing powder, each comprising, as a chief sintering component, a glass material containing, on the basis of oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O with a kneading solution containing not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

34. (New) The preparation method according to claim 32 further comprising coloring and lustering the surface of said crown by applying a kneaded product to the surface of the fired

article, followed by firing, wherein the kneaded product is obtained by kneading a staining powder and a glazing powder, each comprising, as a chief sintering component, a glass material containing, on the basis of oxides, 57 to 65% by weight of SiO₂, 8 to 18% by weight of Al₂O₃, 15 to 25% by weight of B₂O₃, 0.1 to 2% by weight of ZnO, 3 to 7% by weight of Na₂O and 2 to 8% by weight of Li₂O with a kneading solution containing not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C

35. (New) The preparation method according to claim 31 further comprising coloring and lustering the surface of said crown by applying a kneaded product to the surface of the fired article, followed by firing, wherein the kneaded product is obtained by kneading a staining powder and a glazing powder, each comprising, as a chief sintering component, a glass material containing, on the basis of oxides, 57 to 65% by weight of SiO₂, 8 to 18% by weight of Al₂O₃, 15 to 25% by weight of B₂O₃, 0.1 to 2% by weight of ZnO, 3 to 7% by weight of Na₂O and 2 to 8% by weight of Li₂O with a kneading solution containing not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.--

REMARKS


Entry of the foregoing amendment prior to examination of this application is respectfully requested in view of the following comments.

Claims 3-11 have been cancelled and new claims 16-35 have been added. Accordingly, claims 1, 2, 12-15 and 16-35 are pending in this application.

Claims 3-11 have been cancelled to delete the improper multiple dependencies therein. New claims 16-35 correspond to the cancelled claims re-written in proper single dependent form.

No new matter has been added and applicant respectfully submits that this application is in condition for allowance and an early notice to that effect is earnestly solicited.

Respectfully submitted,

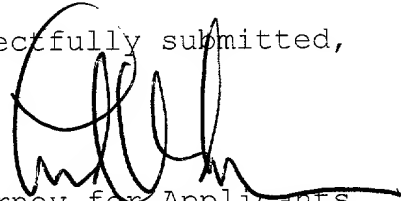

Attorney for Applicants
Leonard W. Sherman
Reg. No. 19,636

SHERMAN & SHALLOWAY
P.O. BOX 788
Alexandria, Virginia 22313
(703) 549-2282

3/PRTS

09/831709

JC08 Rec'd PCT/PTO 14 MAY 2007

1

Title of the Invention:

METHOD OF PREPARING A CERAMIC ARTIFICIAL CROWN AND
A PREPARATION KIT USED THEREFOR

5 Technical Field:

The present invention relates to a method of preparing a fully ceramic artificial crown and a preparation kit used therefor.

Background Art:

- 10 In an aesthetic crown or inlay restration, a material obtained by baking a pottery material called metal-bonded porcelain onto a metal core has heretofore been used. However, this dental prosthetic material has a problem in that the gum undergoes the discoloration due to elution of
15 metal ions. Another problem is that a metal in the core shuts off light making it difficult to reproduce transparent feeling as that of a natural tooth.

- On the other hand, a fully ceramic artificial crown (also called all ceramic artificial crown) of which the
20 core, too, is formed of ceramics does not cause the gum to be discolored by the elution of metal ions, since no metal core is used. Besides, since a material having a transparent feeling close to a natural tooth is used as the ceramic core, it is made possible to realize a natural
25 transparent feeling and to obtain a color feeling closer to a natural tooth due to the lamination of a special porcelain. So far, a metal has in many cases been used as a core of the artificial crown from the standpoint of strength. In recent years, however, technology has been
30 developed to use, as a core material, a crystallized glass that exhibits a large strength (Japanese Unexamined Patent Publication (Kokai) No. 36316/1998, and a fully ceramic artificial crown has been much expected.

- In preparing a fully ceramic artificial crown, in
35 general, it is accepted practice to bake various

09/831709 0044

porcelains onto the ceramic core, the porcelains having different color tones for each of the portions of the crown corresponding to constituent portions of a natural tooth in order to realize appearance close to a natural tooth. Concretely speaking with reference to Fig. 1 which is a sectional view of a fully ceramic artificial crown mounted on an abutment tooth F, it is a practice to bake, in the form of layers, a body porcelain A for reproducing an ivory color, an incisal porcelain B for reproducing an incisal color, a translucent porcelain C for producing a transparent feeling and, as required, a cervical porcelain D for reproducing a color of a neck of a tooth on the ceramic core E. These porcelains are generally obtained by blending a powdery ceramic component having an average particle diameter of from about 15 to about 100 μm with pigments that meet use of the porcelains.

A simple baking of the porcelains in an overlapped manner is not enough for reproducing a delicate color tone of a natural tooth or a pattern specific to an individual person. Therefore, it has been done to impart a color by using a porcelains called staining powder that contains a pigment in a relatively large amount, to smooth the surface and to impart transparency by glazing by baking a porcelain called glazing powder which does not almost contain pigment. Here, in order to realize a delicate color and a feeling of high surface quality, the ceramic component in the staining powder or in the glazing powder, usually, has an average particle diameter of from about 1 to about 15 μm , which is smaller than the average particle diameter of the body porcelain and so forth on described above.

And even in these staining powders, glazing powders and the above-mentioned various porcelains, porcelains as for the fully ceramic crown having coefficients of linear thermal expansion close to that of the crystallized glass

used as the core material, and further having low firing temperatures and improved chemical resistances have been proposed. (Japanese Unexamined Patent Publication (Kokai) No. 139959/2000).

5 As the methods of producing a ceramic core used for the preparation of a fully ceramic artificial crown, there have been known a casting method in which the crystallization of the crystallized glass is performed by heat treatment after casting a molten crystallized glass
10 into a mold, and a heated/pressurized molding method in which a crystallized glass is softened to a suitable degree without being melted and is poured into a mold to prepare a molded article.

 According to the above heated/pressurized molding
15 method, the crystallization of the crystallized glass is happened during the molding, making it possible to shorten the entire working time of molding inclusive of crystallization compared to the casting method, which is an advantage. According to this method, further, the
20 ceramic material is slowly pored into the mold in a highly viscous state of about 10^2 to 10^6 poises without heating it nearly to its melting point, hence one can avoid involving bubbles and the reaction such as baking with the investment material (mold material) forming the mold
25 during the molding, and one can obtain a ceramic artificial crown having stable properties (Japanese Unexamined Patent Publication (Kokai) No. 206782/1999).

 Thus, the heated/pressurized molding method exhibits excellent characteristics as a method of producing ceramic
30 cores requiring, however, an extended periods of time for molding the core since the highly viscous material is slowly poured.

 In order to shorten the molding time, there can be contrived to increase the rate of molding the crystallized
35 glass by increasing the load at the time of exerting

pressure and elevating the temperature at the time of molding.

When the load is increased by using a weight, however, the weight of a large size must be used for the
 5 pressurized molding device. Even in other pressurized devices, it is necessary to employ a structure that withstands the pressure, arousing a problem in that the device tends to become bulky. Due to a large load, further, the surface of the investment material is rubbed
 10 by the crystallized glass that is poured. Depending upon the investment material that is used, therefore, the surface of the molded article is coarsened or the mold is broken. When the temperature is raised during the pressurized molding, further, the crystallization proceeds
 15 faster, and it becomes difficult to control the crystallization and the quality of the obtained core decreases.

According to the heated/pressurized molding method as described above, a new problem arises when it is attempted
 20 to shorten the molding time by increasing the load at the time of exerting pressurize or by elevating the molding temperature. It has, therefore, been urged to provide a method of shortening the molding time without accompanied by the above-mentioned problem.

25 The dental porcelain favorably used as the ceramic core surely exhibits excellent properties. When it is really used, however, the color of the core ceramics tends to be seen through due probably to that light is not suitably scattered inside thereof. To obtain a color tone
 30 comparable to that of a natural tooth, therefore, it is necessary for the dental porcelain to impart a suitable degree of transparency which inhibits the underlying color from being seen through.

Disclosure of the Invention:

35 It is an object of the present invention to develop a

method of efficiently producing a fully ceramic artificial crown of a high quality within short periods of time.

In order to overcome the above-mentioned technical assignment, the present inventors have forwarded a keen study. As a result, the inventors have discovered the fact that when a core is molded by using a mold on which surface is formed a film of a solid lubricant by a particular method, the heated crystallized glass can be poured into the mold at an increased rate causing neither the surface coarsening nor the breakage of the mold, and have thus arrived at the present invention.

That is, a first invention is concerned with a method of preparing a ceramic artificial crown by applying at least one kind of dental porcelain selected from the group consisting of a body porcelain, an incisal porcelain and a translucent porcelain onto the surface of a ceramic core molded by heating and softening a ceramic material and putting it into a mold with the application of a pressure followed by firing; wherein

said mold is the one formed by burning a wax pattern after having removed a crucible former from an assembly which comprises:

said crucible former having a pole member formed on the central portion of a cylinder with bottom, said pole member having a recessed fitting portion at a central portion in the upper surface thereof;

said wax pattern secured to said recessed fitting portion and applied with a solid lubricant on the surface thereof;

a ring with a backing layer that engages with said cylinder with bottom; and

a investment material filled and cured between said ring and a tooth-shaped model; and wherein a portion corresponding to the pole member of the crucible former of said mold is filled with a ceramic

material which is, then, pushed by a plunger to mold a ceramic core.

According to the above-mentioned preparation method of the present invention, the wax pattern can be easily
5 secured during the process of making the mold and, besides, the mold is not broken, the surface of the molded article is not coarsened and the crystallization does not lose uniformity even when the flow rate of the ceramic material such as the crystallized glass is increased at
10 the time of molding the ceramic core, making it possible to produce an article of a quality comparable to that of the ceramic cores obtained by the conventional heated/pressurized molding method maintaining good reproducibility. The above effect is obtained probably
15 because when the mold is produced by a particular method as described above, an appropriate lubricating film which lowers the resistance effectively at the time when the ceramic material is inserted is formed on the surface of the mold that comes into contact with the ceramic
20 material.

In the above-mentioned preparation method, it is possible to obtain a highly aesthetic fully ceramic artificial crown by including a step of coloring the surface by applying a surface-coloring material onto the
25 surface of a fired article on which porcelain materials are baked followed by firing, and a step of lustering by applying a glazing powder onto the surface of the fired article obtained through the above step followed by firing. Here, the step of coloring the surface and the
30 step of lustering are favorably effected by applying a kneaded product onto the surface of the fired article obtained in the step preceding said steps followed by firing, said ground product being obtained by grinding a staining powder or a glazing powder each comprising, as a
35 chief sintering component, a glass material containing, on

the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O with a kneading solution containing not
5 less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

In the above preparation method, the solid lubricant is applied to the wax pattern by applying a suspension containing, for example, 0.1 to 30% by weight of a solid
10 lubricant, 0.1 to 20% by weight of an organic binder and the remainder of an organic solvent, followed by drying.

When a crystallizable $\text{MgO} - \text{CaO} - \text{SiO}_2$ glass material is used as a ceramic material, softened so as to possess a viscosity of from 10^2 to 10^9 poises and is put into a
15 mold, there takes place the crystallization of the glass material during the molding of the ceramic core, making it possible to efficiently obtain a highly strong ceramic core.

In forming the mold, further, when there is used the
20 crucible former having a pole member of which the diameter is widened downward being tapered at 0.005 to 0.120, it becomes easy to remove the crucible former from the assembly and, besides, the ceramic material being filled in the portion corresponding to the pole member of the
25 former of the mold is not adversely affected even when it is being pushed by a plunger.

When the plunger is made of a ceramic material having a melting point or a decomposition temperature, whichever is lower, which is higher than a temperature of forming
30 the ceramic artificial crown and having a thermal conductivity of not smaller than $0.1 (\text{cal} \cdot \text{cm}^{-1} \cdot \text{sec}^{-1} \cdot ^\circ\text{C}^{-1})$ or a coefficient of linear expansion of not larger than $4.0 \times 10^{-6} (^\circ\text{C}^{-1})$, there is no need of preheating the plunger at the time of molding the ceramic core, and the
35 molding time can be shortened. When a solid lubricant

such as boron nitride or the like is adhered on the surface of the plunger that comes into contact with the ceramic material, further, the plunger can be used again easily after the molding.

5 The present inventors have further discovered the fact that when a porcelain to which is added an inorganic crystalline powder having a particular refractive index is used, aesthetic property is improved compared to when a conventional porcelain is used.

10 That is, a second invention is concerned with a dental porcelain used as a body porcelain, an incisal porcelain or a translucent porcelain in the preparation of a ceramic artificial crown, and comprising:

100 parts by weight of a glass material containing,
15 on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

0.1 to 10 parts by weight of an inorganic crystalline
20 powder having a refractive index which is different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm .

When the above dental porcelain is baked, the color
25 of the underlying ceramic core is blurred maintaining a suitable degree of transparent feeling, and a color tone close to that of a natural tooth can be realized.

Inclusive of the use of the dental porcelain of the present invention, the preparation method of the present
30 invention can be preferably carried out by using a dedicated kit which constitutes the third and fourth inventions.

That is, the third invention is concerned with a kit used for the preparation of a ceramic artificial crown,
35 which comprises:

a crucible former having a pole member formed on the central portion of a cylinder with bottom, said pole member having a recessed fitting portion at a central portion in the upper surface thereof to which a wax pattern is to be secured;

a ring that engages with the cylinder with bottom of said crucible former;

a backing member fitted to the inner surface of the ring;

a investment material filled between the crucible former and the ring;

a plunger for pushing the ceramic member filled in a portion corresponding to the pole member of the crucible former of the mold that is formed by curing the investment material, removing the crucible former and burning the wax pattern; and

a container for suspension to apply a solid lubricant onto the wax pattern or onto a portion of the plunger that comes into contact with the ceramics.

The fourth invention is concerned with a kit used for the preparation of a ceramic artificial crown while imparting color and luster, comprising:

a staining powder and a glazing powder each containing, as a sintering component and on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

a container for a kneading solution that contains not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

Brief Description of Drawings:

Fig. 1 is a sectional view of a representative fully ceramic artificial crown;

Fig. 2 is a view schematically illustrating in cross

section a typical mold used in the present invention; and

Fig. 3 is a view schematically illustrating in cross section of when a casting ring and a backing member is set to a crucible former to which is secured a wax pattern in
5 preparing a mold used in the present invention.

Best Mode for Carrying Out the Invention

A ceramic material used in the present invention as a starting material of the ceramic core is a nonmetallic inorganic material obtained through the step of heat
10 treatment, and may be any material without particular limitation provided it can be softened and shaped by the application of heat and pressure. A known ceramic material that is generally used as the material for an artificial crown can be used.

15 Examples of the ceramic material include a glass, a crystallized glass (glass ceramic), bio-ceramic and composite compounds thereof. Among these ceramic materials, it is desired to use a ceramic material which exhibits fluidity in a heated and pressurized state and
20 which will have been crystallized already before being heated at the time of molding or which can be crystallized by heating at the time of molding, since the crown prepared therefrom exhibits excellent abrasion resistance and aesthetic property.

25 As the ceramic material that will have been crystallized already before being heated at the time of molding, there has been known a material obtained by precipitating leucite crystals having a large coefficient of thermal expansion as a strength-imparting factor in the
30 glass matrix.

As the glass material that can be crystallized by heating at the time of molding, there can be exemplified a glass material in which fine separation of phase takes place due to the heating and the volume crystallization
35 proceeds to turn into a crystallized glass (glass

ceramics) and a glass material which contains fine crystals called immature nuclei having a particle diameter of from about 8 to about 30 nm that form crystalline nuclei, the immature nuclei growing through the subsequent
5 heat treatment to turn into a crystallized glass (glass ceramic).

The glass material that contains the crystalline nuclei and turns into the crystallized glass is obtained by treating a MgO - CaO - SiO₂ glass, a CaO - SiO₂ glass
10 or an Li₂O - SiO₂ glass at a temperature range near the glass transition temperature or higher by about 100°C than the glass transition temperature for a predetermined period of time (called nucleus-forming treatment). When the above-mentioned viscosity is maintained, these glass
15 materials permit the volume crystallization to suitably proceed and turn into crystallized glasses (glass ceramics) suited for preparing a artificial crown.

Among such glass materials, it is particularly preferred to use the MgO - CaO - SiO₂ glass material
20 obtained by melting a starting powder of a composition containing 12 to 26% by weight of MgO, 7 to 16% by weight of CaO, 6 to 19% by weight of Al₂O₃, 40 to 50% by weight of SiO₂ and 10 to 14% by weight of TiO₂ (this glass material belongs to the diopside glass ceramic) disclosed
25 in Japanese Unexamined Patent Publication (Kokai) No. 36316/1998 which is subjected to the nucleus-forming treatment.

In the present invention, the ceramic core is produced by molding in which the ceramic material
30 mentioned above is softened appropriately without melting and put into the mold made by the following specific method.

That is, according to the present invention, a ceramic core is formed by using a mold that is formed by
35 burning a wax pattern after having removed a crucible

5

10

25

30

recessed fitting portion 113, so that the wax pattern 9 is secured. From the standpoint of easy handling and easy moldability, it is desired that the crucible former 11 is the one in which the pole member 112 is tapered at 0.005 to 0.120 to possess a diameter that expands downward and, particularly, the one made of a synthetic rubber for easy removal as proposed already by the present inventors in Japanese Patent Application No. 73916/1999. Here, if two given points of the pole member 112 have heights denoted by h1 and h2 (heights from the upper surface of the bottom of the crucible former 11) and diameters at that heights are denoted by a1 and a2, then, the taper stands for a value defined by the following formula,

$$|(a1 - a2)/(h1 - h2)|$$

After the wax pattern 9 is secured as described above, a solid lubricant is applied onto the surface of the wax pattern 9 and, as required, onto the surface of the sprue line 10. Then, the solid lubricant is transferred onto the surface of the investment material when the wax pattern is burned and, whereby, a solid lubricant film is formed in the mold, making it possible to shorten the molding time when the ceramic material is put into the mold.

There is no particular limitation on the method of applying the solid lubricant. Preferably, however, a suspension containing a solid lubricant powder, an organic solvent and an organic binder (hereinafter also simply referred to as coating solution) is applied to the surface of the wax pattern 9 and, as required, to the surface of the sprue line 10, and is dried.

There is no particular limitation on the solid lubricant which is a component of the coating solution provided it is a solid that exhibits a lubricating action. Concrete examples of the solid lubricant that can be preferably used in the present invention include tungsten

disulfide, carbon fluoride, graphite, β -tantalum sulfide, α -tantalum selenide and boron nitride. These solid lubricants may be used in a single kind or those of different kinds may be used being mixed together. Among
 5 the above solid lubricants, it is particularly desired to use the boron nitride because of its very excellent stability at high temperatures.

Though there is no particular limitation, it is desired that the solid lubricant has a particle diameter
 10 of from 0.01 to 100 μm from the standpoint of obtaining a high lubricating effect. When the particle diameter is not larger than 0.01 μm , the function of the lubricant decreases. When the particle diameter is not smaller than 100 μm , it becomes difficult to apply the lubricant.

15 The organic binder used for the coating solution so works that the solid lubricant film containing the organic binder formed on the wax pattern will not be peeled when it is invested in the investment material or is rubbed due to any other technical operation. There is no particular
 20 limitation on the organic binder used in the present invention provided it has the above-mentioned function and can be burned when the wax pattern is burned. Concrete examples of the organic binder that can be preferably used include water-soluble organic binders such as polyvinyl
 25 pyrrolidone, polyacrylic acid and polyethylene glycol; acrylic resins such as polymethyl methacrylate, polyethyl methacrylate, polyisobutyl methacrylate, and polynormalbutyl methacrylate; vinyl resins such as polyvinylacetic acid; cellulose polymers such as
 30 nitrocellulose, ethyl cellulose, cellulose acetate butylate; and water-insoluble organic materials such as alkyd resin, phenol resin, polyester, polystyrene, polyoxyethylenecetyl ether, propylene glycol monostearate, diglyceryl monostearate, polyoxyethylenestearyl ether,
 35 tetraglyceryl tristearate, polyoxyethyleneglycerine

monostearate and polyethyleneglycerine monostearate. These organic binders may be used in a single kind or those of different kinds may be used being mixed together.

Among these organic binders, it is desired to use a
 5 water-insoluble organic binder because of its particularly high antipeeling effect when invested and, particularly, to use an organic binder which is a water-insoluble polymer having a molecular weight of not smaller than 2000.

10 The organic solvent in the coating solution contributes to dispersing the solid lubricant, improving applicability and adjusting the thickness of the film. There is no particular limitation on the organic solvent provided it is compatible with the pattern member such as
 15 wax and is capable of dissolving the organic binder that is used.

Examples of the organic solvent that can be preferably used include alcohols such as methanol, ethanol, 1-propanol, 2-propanol, 1-butanol, 2-butanol,
 20 2-methyl-1-propanol, 2-methyl-2-propanol, 1-pentanol, 2-pentanol, 3-pentanol, 2-methyl-1-butanol, isopentyl alcohol, 2-methyl-2-butanol, 3-methyl-2-butanol, 2,2-dimethyl-1-propanol, 1-hexanol, 2-methyl-1-pentanol, 4-methyl-2-pentanol, 2-ethyl-1-butanol, 1-heptanol,
 25 2-heptanol, 3-heptanol, 1-octanol, 2-octanol, 2-ethyl-1-hexanol, 3,5,5-trimethyl-1-hexanol, allyl alcohol, propargyl alcohol, cyclohexanol, 1-methylcyclohexanol, 2-methylcyclohexanol, 3-methylcyclohexanol, 4-methylcyclohexanol, abietinol, 1,2-ethanediol,
 30 1,2-propanediol, 1,2-butanediol, 2,3-butanediol, 2-methyl-2,4-pentanediol and 1,2,6-hexanetriol; ether compounds such as diethyl ether, dipropyl ether, diisopropyl ether, dibutylether, dihexyl ether, ethylvinyl ether, butylvinyl ether, dioxane, trioxane, furan, tetrahydrofuran, 1,2-
 35 dimethoxyethane, 1,2-diethoxyethane, 1,2-dibutoxyethane,

5 methyl isobutyl ketone, methyl pentyl ketone, dipropyl ketone, diisobutyl ketone, acetyl acetone, mesityl oxide, phorone, isophorone, methylcyclohexanone and acetophenone; esterified compounds such as methyl formate, ethyl formate, propyl formate, butyl formate, isobutyl
10 formate, pentyl formate, methyl acetate, ethyl acetate, propyl acetate, isopropyl acetate, butyl acetate, isobutyl acetate, pentyl acetate, isopentyl acetate, sec-hexyl acetate, 2-ethylbutyl acetate, 2-ethylhexyl acetate, cyclohexyl acetate, benzyl acetate, methyl propionate, ethyl propionate, butyl propionate, isopentyl propionate, methyl butyrate, ethyl butyrate, butyl butyrate, ethylene glycol monoacetate, ethylene diacetate, monoacetic, diacetic, triacetic and diethyl carbonate; hydrocarbon compounds such as pentane, 2-methylbutane, hexane, 2-methylpentane, 2,2-dimethylbutane, 2,3-dimethylbutane, heptane, octane, 2,2,3-trimethylpentane, isooctane, benzene, toluene, xylene, ethylbenzene, methylcyclopentane, cyclohexane, methylcyclohexane, ethylcyclohexane and cyclohexene; and halogenated
25 hydrocarbons such as dichloromethane, chloroform, carbon tetrachloride, 1,1-dichloroethane, 1,2-dichloroethane, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,2-dichloroethylene, trichloroethylene, tetrachloroethylene, 1,2-dichloropropane, butyl chloride and 1-chloropentane.
30 These organic solvents may be used in a single kind or those of different kinds may be used being mixed together.

acetophenone; esterified compounds such as methyl formate, ethyl formate, propyl formate, butyl formate, isobutyl formate, pentyl formate, methyl acetate, ethyl acetate, propyl acetate, isopropyl acetate, butyl acetate, isobutyl acetate, pentyl acetate, isopentyl acetate, sec-hexyl acetate, 2-ethylbutyl acetate, 2-ethylhexyl acetate, cyclohexyl acetate, benzyl acetate, methyl propionate, ethyl propionate, butyl propionate, isopentyl propionate, methyl butyrate, ethyl butyrate, butyl butyrate, ethylene glycol monoacetate, ethylene diacetate, monoacetic acid, diacetic acid, triacetic acid and diethyl carbonate; hydrocarbon compounds such as pentane, 2-methylbutane, hexane, 2-methylpentane, 2,2-dimethylbutane, 2,3-dimethylbutane, heptane, octane, 2,2,3-trimethylpentane, isooctane, benzene, toluene, xylene, ethylbenzene, methylcyclopentane, cyclohexane, methylcyclohexane, ethylcyclohexane and cyclohexene; and halogenated hydrocarbons such as dichloromethane, chloroform, carbon tetrachloride, 1,1-dichloroethane, 1,2-dichloroethane, 1,1,1-trichloroethane, 1,1,2-trichloroethane, 1,2-dichloroethylene, trichloroethylene, tetrachloroethylene, 1,2-dichloropropane, butyl chloride and 1-chloropentane.

These organic solvents may be used in a single kind or those of different kinds may be used being mixed together.

Among the above-mentioned organic solvents, when there is used the one having a boiling point of from 30 to 200°C, the drying time can be shortened. It is therefore desired to use the organic solvent having such a boiling

point.

The organic solvent used for the coating solution may be suitably selected depending upon the kind of the organic binder that is used. Described below are suitable combinations of the organic binders and the organic solvents.

That is, when an ethyl cellulose is used as the organic binder, the organic solvent that is used will be chloroform, 1,4-dioxane, 2-propanol, methyl ethyl ketone, 1,2-dimethoxyethane or ethyl acetate. When a polymethyl methacrylate is used as the organic binder, the organic solvent will be xylene, methylene chloride, chloroform, benzene, methyl ethyl ketone, 1,2-dimethoxyethane or ethyl acetate. When a polystyrene is used as the organic binder, the organic solvent will be benzene, ethyl benzene, acetone, tetrahydrofuran, methyl ethyl ketone or ethyl acetate. When a polyvinyl acetate is used as the organic binder, the organic solvent will be benzene, chloroform, methyl ethyl ketone, 1,2-dimethoxyethane or ethyl acetate.

There is no particular limitation on the contents of the solid lubricant, organic binder and organic solvent in the coating solution. From the standpoint of lubricating effect and applicability, however, it is desired that the amount of the solid lubricant is from 0.1 to 30% by weight, the amount of the organic binder is from 0.1 to 20% by weight and the remainder is the organic solvent on the basis of the total weight of the above three.

Further, the combination is not limited the one of a single kind of organic solvent and a single kind of organic binder, but may be those of plural kinds of organic solvents and plural kinds of organic binders. For example, when the ethyl cellulose and the polymethyl methacrylate are used as the organic binder, there may be used such solvents as methyl ethyl ketone, 1,2-

dimethoxyethane, ethyl acetate and heptane in combination.

To the coating solution may be added various additives such as surfactant and the like that are contained in a solution applied before the technical
5 operation within a range of not impairing the effect of the present invention.

There is no particular limitation on the method of preparing the coating solution or on the method of applying the coating solution onto the wax pattern 9 (and,
10 as required, onto the sprue line 10). For example, the coating solution obtained by mixing the components of predetermined amounts in a container made of a plastic, a glass or a metal, is applied to the surface of the wax pattern by spraying or by using a brush. Or, the wax
15 pattern is dipped in the coating solution (immersed and taken out).

In this case, it is desired that the coated film has a thickness of from 5 to 100 μm after drying. The coated film having a thickness lying in this range is not peeled
20 off when it is invested, and not only improves the rate of introducing the ceramic material into the mold but also improves the quality of the obtained molded article.

In order to improve compatibility to the coating solution, it is desired to apply a surfactant in advance
25 onto the surface of the wax pattern on where the coating solution will be applied prior to applying the coating solution. As the surfactant, there can be used a known surfactant of the ionic type or the nonionic type without any limitation. The solid lubricant may be applied to the
30 wax pattern before it is secured to the crucible former. From the standpoint of operability, however, it is desired to apply the solid lubricant after the wax pattern is secured.

Then, the backing member 3 and the casting ring 4 are
35 set to the crucible former 11 in which the wax pattern 9

and the like are set as shown in Fig. 3, and the investment material is poured on the inside of the casting ring 4 and the backing member 3 so that the wax pattern 9, sprue line 10 and pole member of the crucible former 11 are invested therein. Thereafter, the investment material is cured. After the investment material has been cured, the crucible former 11 is removed, and the investment material is heated to burn the wax pattern 9 and the sprue line 10 therein, thereby to prepare the mold 1.

10 The materials used in the method of fabricating the mold 1 are those that are used in an ordinary casting method or heated/pressurized molding method except the coating solution. For example, the investment material is the one of the phosphate type, cristobalite type or gypsum
15 that is generally used. Among them, it is particularly desired to use the investment material of gypsum since it permits the molded article to be easily taken out and makes it possible to obtain a molded article having a surface luster. As for the wax for wax pattern, sprue
20 line and backing member, there can be used those which have been placed in the market as the materials for dental use without any limitation.

By using the thus obtained mold, a ceramic core is molded in the same manner as by the conventional
25 heated/pressurized molding method. Namely, the ceramic material-holding portion (corresponding to the pole member of the crucible former) of the mold is filled with the ceramic material which is the starting material. The ceramic material is, then, heated and softened, and is
30 pushed by a plunger so as to be molded.

Here, it is desired that the ceramic material which is the starting material has been molded in advance in the shape of a pole member so as to be loosely inserted in the ceramic material-holding member 5 maintaining a clearance
35 of 0.3 to 0.8 mm and having a volume slightly larger (by

10 to 50%) than the total volume of the sprue portion 6 and the tooth-shaped portion 7 of the mold. When the crystallized glass is used as the ceramic material, it is desired to effect the above-mentioned pre-molding to also
 5 form the nuclei mentioned earlier.

There is no particular limitation on the heating temperature at the time of pushing the ceramic material provided it is lower than the melting point of the ceramic material. From the standpoint of molding, however, it is
 10 desired that the temperature is such that the ceramic material assumes a viscosity of from 10^2 to 10^9 poises or the temperature is lower than the melting point by 100 to 500°C . For example, when the above-mentioned crystallized
 15 glass is used as the ceramic material, the heating temperature is usually from 800°C to 1200°C . The melting point of the ceramic material can be defined to be a temperature at which the ceramic material assumes a viscosity of 10^2 poises.

The thus heated and softened ceramic member is
 20 introduced into the mold by being pressurized by the plunger, and is molded into a ceramic core. As the plunger used here, it is prefer to use the plunger which is made of a ceramic material having a melting point or a decomposition temperature, whichever is lower, which is
 25 higher than a temperature of molding the ceramic crown, and having a thermal conductivity of not smaller than $0.1 (\text{cal}\cdot\text{cm}^{-1}\cdot\text{sec}^{-1}\cdot^\circ\text{C}^{-1})$ or having a coefficient of linear expansion of not larger than $4.0 \times 10^{-6} (^\circ\text{C}^{-1})$ because it is not broken by a heat shock that results from a sudden
 30 heating to omit the preheating and, hence, to shorten the molding time.

Further, from the standpoint of easily removing the ceramic material adhered to the plunger after the ceramic core has been molded and of lengthening the life of the
 35 plunger that is repetitively used, it is desired to apply

the solid lubricant such as boron nitride to a portion of the plunger that comes in contact with the ceramic material in the like manner when it is applied to the wax pattern at the time of preparing the mold.

5 There is no particular limitation on the pressurizing method or on the pressurizing condition at the time of molding, and the load may be exerted by placing a weight, by transmitting the force of a motor to the piston through gears or by pressurizing the piston using the compressed
10 air to produce a pressure of from about 2 to about 20 kg/cm². In order that the crystallization takes place uniformly at the time of molding to obtain a ceramic core of a high quality, it is desired to execute the two-step pressurization; i.e., the sprue portion 6 is filled with
15 the ceramic material under 300 to 500 g/cm² and the tooth-shaped portion 7 is filled with the ceramic material under a pressure which is greater by more than 10 times thereof as disclosed in Japanese Unexamined Patent Publication (Kokai) No. 206782/1999. The two-step pressurization can
20 be favorably conducted by using an electric furnace capable of executing the pressing with the compressed air, such as EP-500 (manufactured by IVOCLAR Co.) or by using an electric furnace for heated/pressurized molding method employing a particular weight loading system as disclosed
25 in Japanese Unexamined Patent Publication (Kokai) No. 226976/1999. The ceramic member introduced into the mold is removed from the mold by breaking the mold after cooled like in the conventional heated/pressurized molding method and is, then, polished as required to obtain a ceramic
30 core.

As will be obvious from the foregoing description, the ceramic core according to the preparation method of the present invention is molded by using a dedicated kit that comprises (i) a crucible former having a pole member
35 formed on the central portion of a cylinder with bottom,

said pole member having a recessed fitting portion at a central portion in the upper surface thereof with which a wax pattern is to be fitted, (ii) a ring that engages with the cylinder with bottom of said crucible former, (iii) a
 5 backing member fitted to the inner surface of the ring, (iv) a investment filled between the crucible former and the ring, (v) a plunger for pushing the ceramic member filled in a portion corresponding to the pole member of the crucible former of the mold that is formed by curing
 10 the investment, removing the crucible former and burning the wax pattern, and (vi) a container for containing a suspension for applying a solid lubricant onto the wax pattern or onto a portion of the plunger that comes into contact with the ceramics.

15 According to the preparation method of the present invention, various porcelains such as body porcelain, incisal porcelain and translucent porcelain are baked on the surface of the thus obtained ceramic core and, as required further, the coloring and lustering treatment is
 20 effected by baking a staining powder and a glazing powder.

Here, the body porcelain, the incisal porcelain or the translucent porcelain is desirably a dental porcelain (second invention) which is a composition comprising:

100 parts by weight of a glass material containing,
 25 on the basis of oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O , and, particularly, having a coefficient of linear expansion of not larger than 6×10^{-6} ($1/^\circ\text{C}$);
 30 and

0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10
 35 μm ,

from the standpoint of firing, at a temperature lower than the distortion point of the core, the dental porcelain on the core of the glass ceramic of diopside that has a coefficient of linear expansion of as low as 4 to 6×10^{-6} ($1/^{\circ}\text{C}$), permitting little generation of stress that stems from a difference in the contraction at the time of firing and cooling, obtaining a high chemical resistance such as resistance against being dissolved in an acidic solution, and obtaining a suitable degree of transparency for blurring the color of the underlying core.

Here, the glass material used for the dental porcelain of the present invention may be the same as the glass material that is used for the dental porcelain disclosed in Japanese Unexamined Patent Publication (Kokai) No. 139959/2000. As also described in the above publication, the porcelain containing the glass material as a chief component can be fired on the core of the diopside glass ceramic at a temperature lower than the distortion point of the core, little generates stress that stems from a difference in the contraction at the time of firing and cooling, and exhibits a high chemical resistance such as resistance against being dissolved in an acidic solution. From the standpoint of obtaining these features to a conspicuous degree, it is desired that the glass material contains, on the basis of the oxides, 57 to 62% by weight of SiO_2 , 10 to 15% by weight of Al_2O_3 , 15 to 20% by weight of B_2O_3 , 1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 3 to 8% by weight of Li_2O , and, particularly, has a coefficient of linear expansion of not larger than 6×10^{-6} ($1/^{\circ}\text{C}$).

In the present invention, there is added, per 100 parts by weight of the glass material, 0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is different from the refractive

index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm , in order to suitably lower the degree of transparency after baking so that the color of the underlying core will not appear
5 conspicuously, thereby to obtain a color tone close to that of a natural tooth. The above-mentioned effect is not obtained when the inorganic powder added to the glass material is not crystalline but is amorphous, or when the inorganic powder to be added to the glass material has at
10 least any one of the refractive index, particle diameter or amount of addition that lies outside the above-mentioned ranges though it is crystalline. From the standpoint of the effect, it is more desired that the difference (Δ) in the diffractive index is from 0.04 to
15 0.1, the particle diameter is from 0.1 to 5 μm and the amount of addition (parts by weight per 100 parts by weight of the glass material) is from 0.1 to 10 parts by weight.

There is no particular limitation on the inorganic
20 crystalline powder used for the dental pottery material of the present invention provided its refractive index is different from the refractive index of the glass material by from 0.01 to 0.1. Here, the refractive index stands for that of the powder at 23°C, and can be measured by a
25 method (liquid immersion method) in which a refractive index of a liquid organic medium having a predetermined refractive index is regarded to be the refractive index when the liquid becomes transparent by immersing the powder in the liquid. The refractive index of the above
30 liquid organic medium can be measured by using the Abbe' refractometer. In general, the glass material has a refractive index of from 1.45 to 1.55. Therefore, preferred examples of the inorganic crystalline powder will be a quartz (refractive index of 1.54) which is a
35 crystal of silicon dioxide, a cristobalite (refractive

index of 1.48), tridymite (refractive index of 1.48), leucite (refractive index of 1.51), eucryptite (refractive index of 1.58), nepheline (refractive index of 1.53) and a cordierite (refractive index of 1.54).

5 In the dental porcelain of the present invention, the particle size of the glass material is adjusted depending upon the use, the inorganic crystalline powder is mixed and, then, a pigment and an oxidizing agent are added thereto.

10 Concretely speaking, in the case of the body porcelain or the incisal porcelain, the particle diameter of the glass material is so adjusted as to possess an average particle diameter of from 15 to 100 μ m, and the pigment is blended in an amount of from 0.01 to 3 parts by
15 weight per 100 parts by weight of the glass material.

 In the case of the translucent porcelain, it is desired that the particle diameter of the glass material is so adjusted as to possess an average particle diameter of from 5 to 100 μ m, and a white pigment is blended in an
20 amount of smaller than 3 parts by weight per 100 parts by weight of the glass material.

 The above pigment is added to impart a color to the porcelain after baking and to control the transparency. Here, however, since the porcelain is fired at a high
25 temperature, the pigment that is used is usually an inorganic pigment. Representative examples of the inorganic pigment that can be preferably used include vanadium yellow, cobalt blue, chrome pink, iron chrome brown, titanium white and zirconia white.

30 The oxidizing agent which, as required, is added to the dental porcelain of the present invention is the one that is added so that an organic material contained as an impurity is incorporated in the porcelain without completely decomposed during the firing and, hence, to
35 prevent deterioration in the color tone of the porcelain.

There is no particular limitation on the oxidizing agent provided it serves as a source of supplying oxygen. Among them, there is preferably used a sulfate which exhibits a mild oxidizing action and which by itself sublimates at a temperature lower than the firing temperature and does not remain in the fired article and, particularly, an ammonium sulfate $\{(NH_4)_2SO_4\}$. Though there is no particular limitation on the amount of addition, the oxidizing agent is usually added in an amount of from about 0.1 to 5 parts by weight per 100 parts by weight of the glass.

The dental porcelain of the present invention is baked on the ceramic core by applying the porcelains onto the ceramic core followed by firing. There is no particular limitation on the method of application and on the firing method, and there can be employed known methods that are usually used for the porcelains without limitation. For example, the powder of the porcelain is kneaded with water, applied onto the ceramics that becomes the core, and is fired. It is desired that various porcelains are applied in plural layers as shown in Fig. 1. It is desired that the firing temperature is from 680 to 740°C for all of the body porcelain, incisal porcelain and translucent porcelain.

In the preparation method of the present invention, the ceramic core onto which various porcelains are baked may be used as the artificial crown. To obtain a more aesthetic artificial crown, however, it is desired to effect a step of coloring the surface by applying a surface-coloring material onto the surface of a fired article on which a porcelain is baked followed by firing, and a step of lustering by applying a glazing powder onto the surface of the fired article obtained through the above step followed by firing.

Here, the coloring agent (staining powder) is desirably a glass material containing, on the basis of the

oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O and, particularly, having a coefficient of linear expansion of not larger than 6×10^{-6} ($1/^\circ\text{C}$) that is disclosed in Japanese Unexamined Patent Publication (Kokai) No. 139959/2000 while adjusting the particle diameter so as to possess an average particle diameter of from 1 to 15 μm and being blended with 1 to 15 parts by weight of a pigment per 100 parts by weight of the glass material.

When used as the glazing powder, further, the particle diameter of the glass material disclosed in Japanese Unexamined Patent Publication (Kokai) No. 139959/2000 is so adjusted as to possess an average particle diameter of from 1 to 15 μm , and this glass material is used without blended with any additive.

The staining powder and the glazing powder are usually applied by being kneaded with a kneading solution. Here, it is desired to use a kneading solution having a refractive index close to that of the porcelain since the kneaded mud thereof is translucent making it easy to predict the color tone after firing. In particular, it is desired to use a kneading solution for the dental porcelain containing not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C and, especially, a kneading solution for the dental porcelain containing from 10 to 90% by weight of an ester compound having a boiling point of from 100 to 250°C and 90 to 10% by weight of a polyhydric alcohol having 3 to 8 carbon atoms, since it does not permit the organic material to remain after firing, does not cause the color to be blackened, exhibits favorable compatibility with the powder, and does not permit the powder to be dried during the kneading.

Examples of the ester compound having a boiling point of 100 to 250°C include propyl acetate, isopropyl acetate, butyl acetate, isobutyl acetate, sec-butyl acetate, pentyl acetate, isopentyl acetate, 3-methoxybutyl acetate, sec-
 5 hexyl acetate, 2-ethylbutyl acetate, 2-ethylhexyl acetate, cyclohexyl acetate, benzyl acetate, isobutyl isobutyrate, ethyl 2-hydroxy-2-methylpropionate, butyl propionate, isopentyl propionate, butyl butyrate, isopentyl butyrate, ethyl isovalerate, isopentyl isovalerate, methyl benzoate,
 10 ethyl benzoate, propyl benzoate, butyl benzoate, isopentyl benzoate, ethyl cinnamate, γ -butyrolactone, β -butyrolactone, diethyl oxalate, dibutyl oxalate, dipentyl oxalate, diethyl malonate, dimethyl maleate, diethyl maleate, dibutyl maleate, tributyl citrate, ethylene
 15 glycol monoacetate, ethylene diacetate, ethylene glycol monoformic acid ester, ethylene glycol monobutyric acid ester, ethylene glycol monooleic acid ester, ethylene glycol diformic acid ester, ethylene glycol dipropionic acid ester, ethylene glycol monoacetate, monoacetic,
 20 diacetic, triacetic and propylene carbonate.

Among these ester compounds, it is desired to use cyclic ester compounds because of their less odor and favorable dripping property, and it is particularly desired to use a γ -butyrolactone (boiling point of 204°C)
 25 or a β -butyrolactone (boiling point of 172°C).

As the polyalcohol having 3 to 8 carbon atoms, further, there can be used propylene glycol, 1,2-butanediol, 1,3-butanediol, 2,3-butanediol, dipropylene glycol, 2-methylpentanediol, and 2-ethyl-1,3-hexanediol.

30 It is desired that the staining powder and the glazing powder are baked at 650 to 710°C.

As will be obvious from the foregoing description, the step of coloring and the step of lustering can be favorably executed by using a kit which comprises:

35 (i) a stained powder and a glazing powder each

containing, as a sintering component and on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

(ii) a container for a kneading solution that contains not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

EXAMPLES

10 The significance of when the preparation method of the present invention is compared with the conventional preparation method resides in that the preparation method of the present invention makes it possible to shorten the molding time without deteriorating the quality of the ceramic core and permits the color of the underlayer to be less transmitted when the dental porcelain is baked. Concerning these points, therefore, Examples of the invention will be described in comparison with Comparative Examples. It should, however, be noted that the invention is in no way limited to these Examples only.

I. Moldability of the ceramic core.

The ceramic material (also referred to as starting ceramic material) that is the starting material of the ceramic core and the mold used in Examples and in Comparative Examples were prepared as described below.

(1) Preparation of the starting ceramic material.

92.08 Grams of SiO_2 , 28.16 g of MgO , 36.85 g of CaCO_3 , 31.04 g of $\text{Al}(\text{OH})_3$, and 22.63 g of TiO_2 were pulverized by using a ball mill and were mixed together as starting materials. The mixture was introduced into a platinum crucible and was heated and melted at 1500°C for one hour in an electric furnace. Then, the molten glass was poured into the mold and was gradually cooled so as to be pre-molded into a pole member having a volume larger by about 20% than the total volume of the sprue portion 6 and

the tooth-shaped portion 7 of the mold so as to be loosely inserted in the ceramic material-holding portion 5 maintaining a clearance of about 0.5 mm. The thus pre-molded glass member was put into the electric furnace, and
 5 was heat-treated at 700°C for 5 hours so that fine crystals were precipitated in the glass. Here, the temperature was raised at a rate of 300°C/h and, then, the glass material was left to cool in the furnace down to
 10 room temperature to thereby form nuclei. The glass material in which the nuclei were formed (also called starting glass ingot) was used for the heated/pressurized molding.

The obtained starting glass ingot exhibited a viscosity at 900°C of 10^6 poises. After maintained in
 15 this state for 20 minutes and cooled, the starting glass ingot was identified for its precipitated crystals by the X-ray diffraction method. The diopside crystals had been precipitated from which it was confirmed that upon heating, the glass material was crystallized. The melting
 20 point of the glass material was 1300°C.

(2) Preparation of the mold.

A sprue line of a line wax {trade name: Ready Casting Wax, manufactured by GC Co.} of a diameter of 3.2 mm and a length of 7 mm was attached to a wax pattern {trade name:
 25 Natural Wax Pattern C, manufactured by Nisshin Co.} of a premolar of the lower jaw, and was secured to the crucible former.

Then, a predetermined coating solution was applied onto the surface of the wax pattern secured to the
 30 crucible former, and was dried. Thereafter, a casting ring {trade name: JM casting ring, manufactured by Fujiwara Shika Sangyo Co.} and a crystal ribbon {trade name: GC New Casting Liner, manufactured by GC Co.} was set to the crucible former. The coating solution was
 35 applied such that the thickness of the coated film after

drying was 20 μm . The applied coating solution was dried by being left to stand in the open air.

Then, a investment material mud {trade name: OK Powder, manufactured by GC Co.} was poured into the inner
5 side of the casting ring and the crystal ribbon (backing member) so that the wax pattern secured to the crucible former was invested therein. After the investment material was cured, the crucible former was removed, followed by heating at 800°C to burn the wax pattern and
10 the sprue line at 800°C thereby to prepare the mold. (Example 1)

A coating solution was prepared from 4 parts by weight of a boron nitride powder having an average particle diameter of 2 μm , 2 parts by weight of an ethyl
15 cellulose and 94 parts by weight of a methyl ethyl ketone. By using the mold prepared by using the above coating solution, the heated/pressurized molding was conducted in a manner as described below.

That is, the mold was, first, put into a ring furnace
20 {trade name: VR7, manufactured by KDF Co.}, heated up to 800°C at a rate of 50°C a minute over about 15 minutes, and was maintained at this temperature for 45 minutes to pre-heat the mold. After pre-heated, the cylindrical plunger and the starting glass ingot were fitted to the
25 ceramic-holding portion of the mold, which was then introduced into a heated/pressurized furnace that has been heated in advance at 900°C. Thereafter, the starting glass ingot was maintained at 900°C which was a pressing temperature for 10 minutes, and the glass material
30 softened to a sufficient degree was pressurized at this temperature with a pressing load of 7.2 kg/cm² via a plunger so as to be put into the mold. After completely put into the mold, the glass material was maintained at 900°C for another 10 minutes and was, then, cooled. The
35 mold was then broken and the molded article was taken out;

i.e., the ceramic core was prepared.

The heated/pressurized furnace used the electric furnace {trade name: FM-X, manufactured by Yamato Kagaku Co.} in which the pressurizing device of the weight load type was incorporated, and a moment when the glass material was completely poured into the mold was determined by monitoring the distance of motion of the piston by using a digital gauge {trade name: IDA-112M, manufactured by Mitutoyo Co.}.

10 The molding time was 16 minutes, and the surfaces of the molded article had not been coarsened.
(Comparative Example 1)

A molded article was prepared by the heated/pressured molding method in the same manner as in Example 1 but using the mold that was prepared without using the coating solution. The molding time was 25 minutes, and the surfaces of the molded article had not been coarsened.

A comparison of Example 1 with Comparative Example 1 tells that the molding time in Example 1 was shortened by about 30% compared to that of Comparative Example 1 under the same pressure.
(Examples 2 to 25)

The molds were prepared in the same manner as in Example 1 but replacing the coating solution used for the preparation of the mold by the coating solutions of the compositions shown in Table 1, followed by the heated/pressurized molding in the same manner as in Example 1, and the press-moldability (molding time) and the surface states of the molded articles were evaluated.
25 The results were as shown in Table 2.

The molding times and the surface states of the molded articles were evaluated by using the molds prepared without applying the coating solution to the wax pattern and with the pressure of 7.2 kg/cm² (Comparative Example 1) as a reference. The molding times were evaluated to be

"○" when they have been shortened by more than 30%, to be
"△" when the times were shortened by more than 15%, to be
"▽" when the times were shortened not by more than 15%,
and to be "-" when there was no difference from

5 Comparative Example 1. Further, the surface states were
evaluated to be "○" when there was no difference from the
molded article of Comparative Example 1, and to be "X"
when the surfaces were coarsened or the color tone has
changed.

10 Table 1 also shows the composition of the coating
solution used in Example 1, and Table 2 also shows the
evaluated results of Example 1.

15

20

25

30

35

Table 1

Ex. No.	Solid lubricant	Organic binder	Organic solvent
1	boron nitride, 4 pts by wt	ethyl cellulose, 2 pts by wt	methyl ethyl ketone, 94 pts by wt
2	boron nitride, 2 pts by wt	cellulose acetate butyrate, 8 pts by wt	acetone, 90 pts by wt
3	boron nitride, 10 pts by wt	polyvinyl acetate, 10 pts by wt	methyl ethyl ketone, 80 pts by wt
4	boron nitride, 4 pts by wt	polymethyl methacrylate, 4 pts by wt	ethanol, 92 pts by wt
5	boron nitride, 0.1 pt by wt	polybutyl methacrylate, 2 pts by wt	butyl methyl ketone, 97.9 pts by wt
6	boron nitride, 30 pts by wt	polystyrene, 1 pt by wt	2-propanol, 69 pts by wt
7	boron nitride, 4 pts by wt	polyvinyl pyrrolidone, 8 pts by wt	dipropyl ether, 88 pts by wt
8	boron nitride, 20 pts by wt	polyacrylic acid, 10 pts by wt	methyl ethyl ketone, 70 pts by wt
9	boron nitride, 10 pts by wt	polyethylene glycol, 20 pts by wt	isopropyl ketone, 70 pts by wt
10	boron nitride, 8 pts by wt	hydroxypropyl cellulose, 5 pts by wt	acetone, 87 pts by wt
11	boron nitride, 15 pts by wt	ethyl cellulose, 2 pts by wt	1,2-dimethoxyethane, 83 pts by wt
12	boron nitride, 4 pts by wt	polystyrene, 4 pts by wt	ethyl acetate, 92 pts by wt
13	boron nitride, 30 pts by wt	polymethyl methacrylate, 6 pts by wt	2-propanol, 64 pts by wt
14	boron nitride, 5 pts by wt	ethyl cellulose, 6 pts by wt	acetone, 89 pts by wt

Table 1(continued)

Ex. No.	Solid Lubricant	Organic binder	Organic solvent
15	boron nitride, 20 pts by wt	cellulose acetate butyrate, 8 pts by wt	propyl acetate, 72 pts by wt
16	boron nitride, 10 pts by wt	ethyl cellulose, 10 pts by wt	butyl methyl ketone, 80 pts by wt
17	boron nitride, 3 pts by wt	polymethyl methacrylate, 0.1 pt by wt	ethyl acetate, 96.9 pts by wt
18	boron nitride, 2 pts by wt	polystyrene, 5 pts by wt	toluene, 93 pts by wt
19	boron nitride, 8 pts by wt	ethyl cellulose, 10 pts by wt	ethanol, 82 pts by wt
20	boron nitride, 20 pts by wt	ethyl cellulose, 2 pts by wt, polymethyl methacrylate, 1 pt by wt	1,2-dimethoxyethane, 77 pts by wt
21	boron nitride, 4 pts by wt	cellulose acetate butyrate,, 1 pt by wt, polymethyl methacrylate, 4 pts by wt	1,2-dimethoxyethane, 91 pts by wt
22	boron nitride, 10 pts by wt	ethyl cellulose, 1 pts by wt, polyvinyl acetate, 2 pts by wt	ethyl acetate, 87 pts by wt
23	boron nitride, 15 pts by wt	ethyl cellulose, 1 pt by wt, polystyrene, 2 pts by wt	acetone, 82 pts by wt
24	boron nitride, 20 pts by wt	ethyl cellulose, 2 pts by wt	methyl ethyl ketone, 47 pts by wt
25	boron nitride, 5 pts by wt	ethyl cellulose, 1 pt by wt, polymethyl methacrylate, 1 pt by wt	1,2-dimethoxyethane, 31 pts by wt methyl ethyl ketone, 47 pts by wt 1,2-dimethoxyethane, 46 pts by wt

Table 2

	Ex. No.	Press load /kgcm ⁻²	Press temp. /°C	Press- <u>moldability</u>	Surface <u>coarseness</u>
5	1	7.2	900	○	○
	2	7.2	900	○	○
	3	7.2	900	○	○
	4	7.2	900	○	○
10	5	7.2	900	○	○
	6	7.2	900	○	○
	7	7.2	900	△	○
	8	7.2	900	△	○
	9	7.2	900	△	○
15	10	7.2	900	△	○
	11	7.2	900	○	○
	12	7.2	900	○	○
	13	7.2	900	○	○
	14	7.2	900	○	○
20	15	7.2	900	○	○
	16	7.2	900	○	○
	17	7.2	900	○	○
	18	7.2	900	○	○
	19	7.2	900	○	○
25	20	7.2	900	○	○
	21	7.2	900	○	○
	22	7.2	900	○	○
	23	7.2	900	○	○
	24	7.2	900	○	○
30	25	7.2	900	○	○

(Comparative Example 2)

The heated/pressurized molding was conducted in the
 35 same manner as in Comparative Example 1 but setting the

pressure (also referred to as pressing load) during the pressing to be 10 kg/cm². As a result, the molding time was shortened by 30%, but the surface state of the molded article was worsened.

5 (Comparative Example 3)

The heated/pressurized molding was conducted in the same manner as in Comparative Example 1 but setting the heating temperature during the molding to be 920°C. As a result, the molding time was shortened by 30%. However,
10 the crystallization proceeded so much that the molded article was whitened.

When the heated/pressurized molding was conducted by using the mold prepared without using the coating solution as in Comparative Examples 2 and 3, the molding time could
15 be shortened by increasing the pressing load or by elevating the temperature at which the heated/pressurized molding was effected causing, however, the surface of the molded article to be coarsened and the color tone to be changed.

20 (Comparative Example 4 and Examples 26 to 28)

The molds were prepared in the same manner as in Example 1 but replacing the coating solution used for the preparation of the mold by the coating solutions of the compositions shown in Table 3, followed by the
25 heated/pressurized molding in the same manner as in Example 1, and the press-moldability (molding time) and the surface states of the molded articles were evaluated. The results were as shown in Table 3.

Table 3 also shows the results of Comparative
30 Examples 1 to 3.

Table 3

Comp. Ex.No.	Solid Lubricant	Organic binder	Organic solvent	Press load /kgcm ⁻²	Press temp. /°C	Press mold- ability	Surface coarseness
1	none	none	none	7.2	900	—	○
2	none	none	none	10	900	○	×
3	none	none	none	7.2	920	○	×
4	none	ethyl cellulose 2 pts by wt	methyl ethyl ketone 98 pts by wt	7.2	900	—	○
Ex.No. 26	boron nitride 4 pts by wt	none	methyl ethyl ketone, 96 pts by wt	7.2	900	▽	○
Ex.No. 27	boron nitride 35 pts by wt	ethyl cellulose 65 pts by wt	none	7.2	900	▽	○
Ex.No. 28	boron nitride 4 pts by wt	none	none	7.2	900	▽	○

A comparison of Example 1 with Comparative Example 4 tells that when there is used no solid lubricant, the pressing rate is not enhanced.

From Examples 1, 26 and 17, when an organic binder is used, the solid lubricant film is not peeled, contributing to improving the pressing rate.

In Examples 27 and 28, further, the drying required an extended period of time since there was used no organic solvent.

10 II. Properties of the porcelains.

The porcelains were evaluated concerning their optimum firing temperatures, coefficients of thermal expansion, solubilities, color differences and transparencies. These properties were measured by the methods described below.

(1) Determining the optimum firing temperatures.

A sample porcelain and water were kneaded together and were introduced while being condensed into a mold having a thickness of 2 mm and a hole of a diameter of 10 mm to prepare a molded article. Seven molded articles were prepared for each of the glass compositions, and were fired at temperatures each differed by 10°C over a range of 30°C above and 30°C below the firing temperature which was expected from each composition and of which the last digit being rounded off.

The firing was conducted under the conditions of using a Porcelain Furnace Sigma 120 (manufactured by Tokuyama Co.) which is an automatic electric furnace having a function capable of setting a temperature-raising pattern in advance, introducing the crucible in which the molded article has been contained into the furnace after having dried it in advance in a furnace heated at 500°C for 5 minutes, raising the temperature at a rate of 25°/min and maintaining a desired firing temperature for 2 minutes.

The fired articles were observed, and the firing temperatures were regarded to be optimum firing temperatures when there were obtained the fired articles which have been entirely and completely sintered to become translucent, the surfaces thereof without being completely melted but exhibiting a slight degree of ruggedness due to pottery material particles.

(2) Evaluation of coefficient of thermal expansion.

A rectangular parallelepiped measuring 2 mm x 2 mm x 10 mm was cut out from the sintered article of the above sample pottery material to use it as a sample for measurement, and was heated from room temperature up to 500°C by using a thermoanalyzer TMA 120 (manufactured by Seiko Denshi Co.) to measure the coefficient of thermal expansion.

(3) Evaluation of amount dissolved in an acid.

The amount dissolved in an acid was found by calculating the loss of mass $\mu\text{g}/\text{cm}^2$ of a test piece of the sintered article of the sample porcelain in accordance with the Soxhlet extraction method with 4% acetic acid conducted for 16 hours as stipulated under the International Standards (ISO 6872). The test piece was prepared by using a mold having a diameter of 16 mm and a thickness of 1.6 mm.

(4) Evaluation of color difference and transparency.

A sample porcelain and water were kneaded together and were introduced while being condensed into a mold having a thickness of 1.6 mm and a hole of a diameter of 16 mm to prepare a molded article. Then, the molded article was put into a crucible and was fired at a temperature best suited for the porcelain sample by using an automatic electric furnace (Porcelain Furnace Sigma 120, manufactured by Tokuyama Co.) having a function capable of setting a temperature-raising pattern in advance.

After firing, the molded article was cooled and was taken out, and was machined by using a rotary grinder into a thickness of 1 mm to prepare a sample for measurement.

By using a spectrophotometer TC-1800MK-II (manufactured by Tokyo Denshoku Co.), the thus prepared sample for measurement was measured for its L^*_W , a^*_W and b^*_W in the case when the background color was white and L^*_B , a^*_B and b^*_B in the case when the background color was black, and a color difference ΔE^* due to the background color was calculated in compliance with the following formula.

Further, the transparency was calculated in compliance with the following formula depending upon the Y-value of when the background color was white and the background color was black. Here, the Y-value stands for the one among X-value, Y-value and Z-value which are the three stimulating values.

$$\text{Color difference } (\Delta E^*) = ((L^*_W - L^*_B)^2 + (a^*_W - a^*_B)^2 + (b^*_W - b^*_B)^2)^{1/2}$$

Transparency (C) = $1 - (\text{Y-value of when the background color is black} / \text{Y-value of when the background color is white})$

The smaller the value ΔE^* , the smaller the appearance of color (the smaller the degree of underlying color that is seen through). Further, the larger the C-value, the higher the transparency.

(Example 29)

30.4 Grams of silicon dioxide (special grade chemical, manufactured by Wako Junyaku Co.), 8.3 g of aluminum hydroxide (special grade chemical, manufactured by Kanto Kagaku Co.), 8.7 g of boron oxide (special grade chemical, manufactured by Wako Junyaku Co.), 4.7 g of lithium carbonate (special grade chemical, manufactured by Wako Junyaku Co.), 4.0 g of sodium carbonate (special

grade chemical, manufactured by Wako Junyaku Co.) and 1.1 g of zinc oxide (special grade chemical, manufactured by Wako Junyaku Co.) were weighed and mixed, and the mixture was melted at 1300°C for 2 hours and was flown onto a stainless steel plate and was cooled to obtain a uniform glass in the same manner as in Example 1 of Japanese Unexamined Patent Publication (Kokai) No. 139959/2000. Analysis of the thus obtained glass composition indicated 61% by weight of SiO₂, 11% by weight of Al₂O₃, 18% by weight of B₂O₃, 4% by weight of Li₂O, 5% by weight of Na₂O and 2% by weight of ZnO on the basis of the oxides. Further, the refractive index of the glass was measured by the solution immersion method to be 1.504.

Next, the obtained glass was pulverized into a powder having an average particle diameter of 37 μm in an agate mortar. To 100 parts by weight of the thus obtained glass powder was added 3 parts by weight of quartz (silicon dioxide crystals having a refractive index of 1.544) of an average particle diameter of 1.5 μm, and the two components were mixed well to obtain a sample porcelain.

The sample porcelain was measured for its optimum firing temperature, coefficient of thermal expansion, amount of dissolution in an acid, color difference and transparency. The results were as shown in Table 4.

Further, the above sample porcelain and water were kneaded, applied onto the ceramic core prepared in Example 1 and was fired at a firing temperature of 700°C. As a result, a favorable baking was accomplished without cracking on the surface of the porcelain and without peeling between the porcelain and the core. There was not observed, either, deformation of the ceramic core due to the baking of the porcelain.

(Comparative Example 5)

Properties were measured in the same manner as in Example 29 but using a glass powder without containing

quartz powder as a sample pottery material. The results were as shown in Table 4.

5

Table 4

	Optimum firing temp <u>(°C)</u>	Coefficient of therm expansion <u>(x 10⁻⁶ °C)</u>	Amount of dissltn in acid <u>(μG/cm2)</u>	Color differ- ence <u> </u>	Trans- <u>parency</u>	
10						
	Ex.No.					
	<u>29</u>	710	5.5	21	8.65	0.15
15						
	Comp.					
	Ex.No.	700	5.5	19	12.54	0.23
	<u>5</u>					

20 In Example 29 as shown in Table 4, the transparency is slightly deteriorated compared to that of Comparative Example 5 in which no quartz powder is mixed, and the color difference ΔE^* decreases suppressing the appearance of color.

25 When baked onto the ceramic core in the same manner as in Example 29, favorable results were obtained as in Example 29.

According to the method of preparing a ceramic artificial crown of the present invention, the molding time can be shortened without decreasing the quality of the obtained ceramic core. In the heated/pressurized molding method, further, weld lines often develop at a portion where the flows meet in the molded articles. The method of the invention, however, effectively prevents the occurrence of weld lines.

When the dental porcelain of the invention is used in the step of baking the porcelain, further, there is obtained a fully ceramic artificial crown exhibiting excellently aesthetic appearance close to that of a natural tooth without affected by the color of the underlying ceramic core.

10

15

20

25

30

35

"TOTTEN" 6021E300

Claims:

1. A method of preparing a ceramic artificial crown by applying at least one kind of dental porcelain selected
 - 5 from the group consisting of a body porcelain, an incisal porcelain and a translucent porcelain onto the surface of a ceramic core molded by heating and softening a ceramic material and putting it into a mold with the application of a pressure followed by firing; wherein
 - 10 said mold is formed by burning a wax pattern after having removed a crucible former from an assembly which comprises:
 - said crucible former having a pole member formed on the central portion of a cylinder with bottom,
 - 15 said pole member having a recessed fitting portion at a central portion in the upper surface thereof;
 - said wax pattern secured to said recessed fitting portion and applied with a solid lubricant on the surface thereof;
 - 20 a ring with a backing layer that engages with said cylinder with bottom; and
 - a investment material filled and cured between said ring and a tooth-shaped model; and wherein
 - a portion corresponding to the pole member of the
 - 25 crucible former of said mold is filled with a ceramic material which is, then, pushed by a plunger to mold a ceramic core.
 2. A preparation method according to claim 1, further including a step of coloring the surface by
 - 30 applying a surface-coloring material onto the surface of a fired article on which a porcelain is baked followed by firing, and a step of lustering by applying a glazing powder onto the surface of the fired article obtained through the above step followed by firing, thereby to
 - 35 obtain a highly aesthetic fully ceramic artificial crown.

3. A preparation method according to claim 1 or 2, wherein the solid lubricant is applied to the wax pattern by applying a suspension containing a solid lubricant, an organic binder and an organic solvent, followed by drying.

5 4. A preparation method according to claim 3, wherein said suspension comprises from 0.1 to 30% by weight of a solid lubricant, from 0.1 to 20% by weight of an organic binder and the remainder of an organic solvent.

10 5. A preparation method according to any one of claims 1 to 4, wherein the ceramic material put into the mold has a viscosity of from 10^2 to 10^9 poises.

6. A preparation method according to any one of claims 1 to 5, wherein the ceramic material is a crystallizable $\text{MgO} - \text{CaO} - \text{SiO}_2$ glass material.

15 7. A preparation method according to any one of claims 1 to 6, wherein the pole member of the crucible former has a diameter which is widened downward being tapered at 0.005 to 0.120.

20 8. A preparation method according to any one of claims 1 to 7, wherein said plunger is made of a ceramic material having a melting point or a decomposition temperature, whichever is lower, which is higher than a temperature of forming the ceramic artificial crown and having a thermal conductivity of not smaller than 0.1
25 (cal·cm⁻¹·sec⁻¹·°C⁻¹) or a coefficient of linear expansion of not larger than 4.0×10^{-6} (°C⁻¹).

30 9. A preparation method according to any one of claims 1 to 8, wherein a solid lubricant is adhered in advance onto the surface of the plunger that comes into contact with the ceramic material.

35 10. A preparation method according to any one of claims 1 to 9, wherein a dental porcelain is baked after having applied, onto the surface of a ceramic core, a kneaded product obtained by kneading, with water, a body porcelain, an incisal porcelain or a translucent porcelain

TOP SECRET

which comprises:

100 parts by weight of a glass material containing, on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm .

11. A preparation method according to any one of claims 1 to 10, wherein the step of coloring the surface and the step of lustering are effected by applying a kneaded product onto the surface of the fired article obtained in the step preceding said steps followed by firing, said kneaded product being obtained by kneading a staining powder and a glazing powder each comprising, as a chief sintering component, a glass material containing, on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O with a kneading solution containing not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

12. A dental porcelain used as a body porcelain, an incisal porcelain or a translucent porcelain in the preparation of a ceramic artificial crown, and comprising:

100 parts by weight of a glass material containing, on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by weight of Li_2O ; and

0.1 to 10 parts by weight of an inorganic crystalline powder having a refractive index which is

different from the refractive index of the glass material by 0.01 to 0.1, and having an average particle diameter of from 0.1 to 10 μm .

13. A dental porcelain according to claim 12,
 5 wherein said glass material has a coefficient of linear expansion of not larger than $6.0 \times 10^{-6} (^{\circ}\text{C}^{-1})$.

14. A kit used for the preparation of a ceramic artificial crown, which comprises:

- a crucible former having a pole member formed on
 10 the central portion of a cylinder with bottom, said pole member having a recessed fitting portion at a central portion in the upper surface thereof with which a wax pattern is to be secured;

- a ring that engages with the cylinder with bottom
 15 of said crucible former;

a backing member fitted to the inner surface of the ring;

a investment material filled between the crucible former and the ring;

- 20 a plunger for pushing the ceramic member filled in a portion corresponding to the pole member of the crucible former of the mold that is formed by curing the investment material, removing the crucible former and burning the wax pattern; and

- 25 a container for suspension to apply a solid lubricant onto the wax pattern or onto a portion of the plunger that comes into contact with the ceramics.

15. A kit used for the preparation of a ceramic artificial crown while imparting color and luster,
 30 comprising:

- a staining powder and a glazing powder each containing, as a sintering component and on the basis of the oxides, 57 to 65% by weight of SiO_2 , 8 to 18% by weight of Al_2O_3 , 15 to 25% by weight of B_2O_3 , 0.1 to 2% by
 35 weight of ZnO , 3 to 7% by weight of Na_2O and 2 to 8% by

weight of Li_2O ; and

a container for a kneading solution that contains not less than 5% by weight of an ester compound having a boiling point of from 100 to 250°C.

5

10

15

20

25

30

35

T07F50-6024860

Abstract

A method of preparing a ceramic artificial crown by applying at least one kind of dental porcelain selected
5 from the group consisting of a body porcelain, an incisal porcelain and a translucent porcelain onto the surface of a ceramic core molded by heating and softening a ceramic material and putting it into a mold with the application of a pressure followed by firing; wherein

10 said mold is the one formed by burning a wax pattern after having removed a crucible former from an assembly which comprises:

said crucible former having a pole member formed on the central portion of a cylinder with bottom,
15 said pole member having a recessed fitting portion at a central portion in the upper surface thereof;

said wax pattern secured to said recessed fitting portion and applied with a solid lubricant on the surface thereof;

20 a ring with a backing layer that engages with said cylinder with bottom; and

a investment material filled and cured between said ring and a tooth model; and wherein

a portion corresponding to the pole member of the
25 crucible former of said mold is filled with a ceramic material which is, then, pushed by a plunger to mold a ceramic core.

This method makes it possible to efficiently prepare a fully ceramic artificial crown of a high quality in a
30 short period of time.

Fig. 1

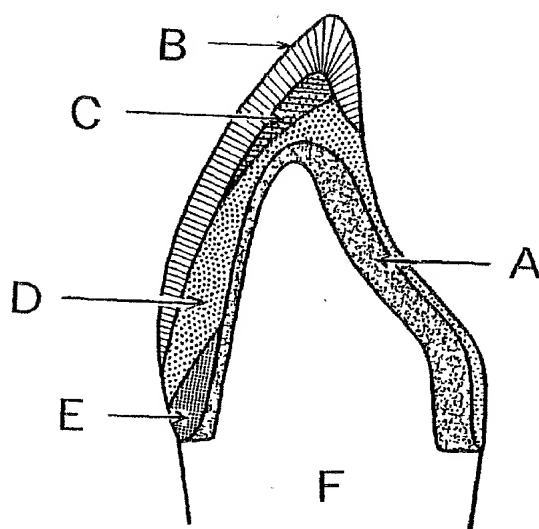


Fig. 2


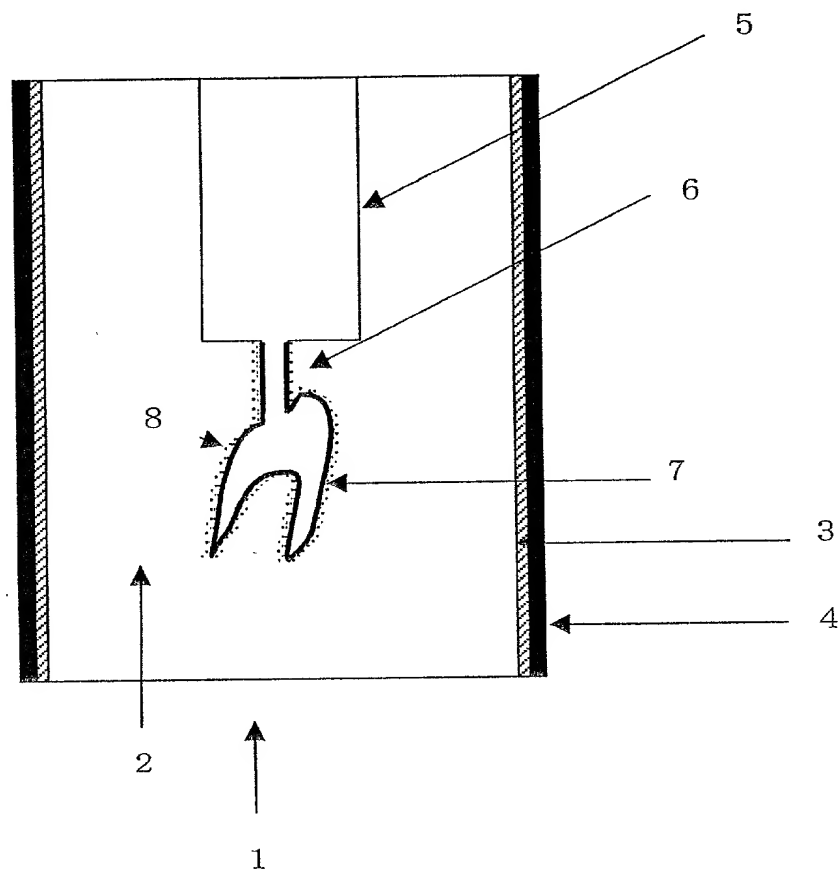


Fig. 3

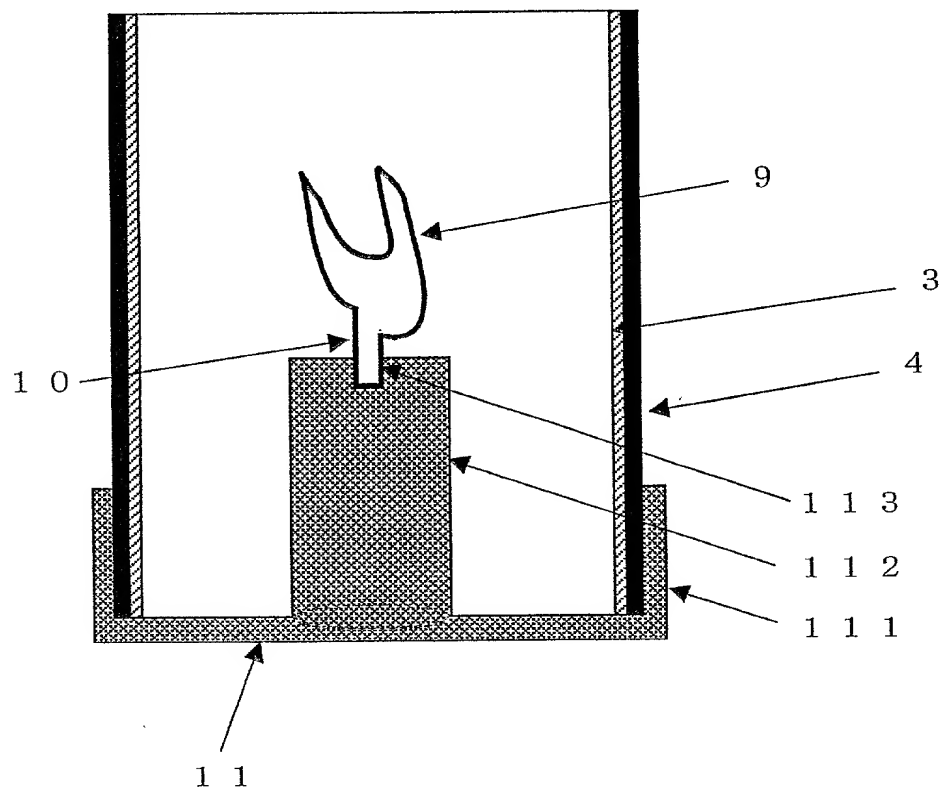

Dkt. No. SPO-594**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitledMethod of preparing a ceramic artificial crown and a preparation kitused therefor, the specification of which:

(check one) ☒ is attached hereto ☐ was filed on _____ as
 Application Serial No. _____ and
 was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) Number	Country	Filed D/M/Y	Priority Claimed
265868/99	Japan	20/9/1999	yes

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

(APPLICATION NUMBER)	(FILING DATE)
(APPLICATION NUMBER)	(FILING DATE)

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u>- PCT/JP00/06288</u>	<u>September 13, 2000</u>	<u>pending</u>
(APPLICATION SERIAL NO.)	(FILING DATE)	(STATUS)
(APPLICATION SERIAL NO.)	(FILING DATE)	(STATUS)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Leonard W. Sherman	Reg. No. <u>19,636</u>	Alan Holler	Reg. No. <u>29,266</u>
Edwin A. Shalloway	Reg. No. <u>19,967</u>	Karl Hoback	Reg. No. <u>23,026</u>
Richard A. Steinberg	Reg. No. <u>26,588</u>	Robert L. Haines	Reg. No. <u>35,333</u>
Perry Carvellas	Reg. No. <u>19,637</u>		

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

SHERMAN & SHALLOWAY
413 North Washington Street
Alexandria, Virginia 22314

(703) 549-2282

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine and imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or document or any patent issuing thereon.

Full name of sole or first inventor

Masato Sekino
GIVEN NAME MIDDLE NAME FAMILY NAME

Inventor's signature

Masato Sekino

Date of signature

May 7, 2001

Residence

Tokuyama Yamaguchi-ken Japan
CITY STATE OR PROVINCE COUNTRY

Citizenship

Japan

Post Office Address
(insert complete mailing address, including country)

c/o Tokuyama Corporation, 1-1, Mikage-cho,
Tokuyama-shi, Yamaguchi 745-0053, Japan

Full name of second inventor

Masaaki Ushioda
GIVEN NAME MIDDLE NAME FAMILY NAME

Inventor's signature

Masaaki Ushioda

Date of signature

May 7, 2001

Residence

Tokuyama Yamaguchi-ken Japan
CITY STATE OR PROVINCE COUNTRY

Citizenship

Japan

Post Office Address
(insert complete mailing address, including country)

c/o Tokuyama Corporation, 1-1, Mikage-cho,
Tokuyama-shi, Yamaguchi 745-0053, Japan

Full name of third inventor

Kyoichi Fujinami
GIVEN NAME MIDDLE NAME FAMILY NAME

Inventor's signature

Kyoichi Fujinami

Date of signature

May 7, 2001

Residence

Tokuyama Yamaguchi-ken Japan
CITY STATE OR PROVINCE COUNTRY

Citizenship

Japan

Post Office Address
(insert complete mailing address, including country)

c/o Tokuyama Corporation, 1-1, Mikage-cho,
Tokuyama-shi, Yamaguchi 745-0053, Japan

☐ ADDITIONAL INVENTORS ARE BEING NAMED ON SEPARATELY NUMBERED SHEETS ATTACHED HERETO

ADDITIONAL INVENTORS

PAGE 3

Full name of
inventor

Osamu

Iwamoto

GIVEN NAME

MIDDLE NAME

FAMILY NAME

Inventor's signature

Osamu Iwamoto

Date of signature

May 7, 2001

Residence

Tokuyama

Yamaguchi-ken

Japan

CITY

STATE OR PROVINCE

COUNTRY

Citizenship

Japan

Post Office Address
(insert complete mailing
address, including country)

c/o Tokuyama Corporation, 1-1, Mikage-cho,

Tokuyama-shi, Yamaguchi 745-0053, Japan

Full name of
inventor

GIVEN NAME

MIDDLE NAME

FAMILY NAME

Inventor's signature

Date of signature

Residence

CITY

STATE OR PROVINCE

COUNTRY

Citizenship

Post Office Address
(insert complete mailing
address, including country)

Full name of
inventor

GIVEN NAME

MIDDLE NAME

FAMILY NAME

Inventor's signature

Date of signature

Residence

CITY

STATE OR PROVINCE

COUNTRY

Citizenship

Post Office Address
(insert complete mailing
address, including country)